


H1000CH

Part Number: H1000CH

COAX RF H1000 FRNC/LSNH-C

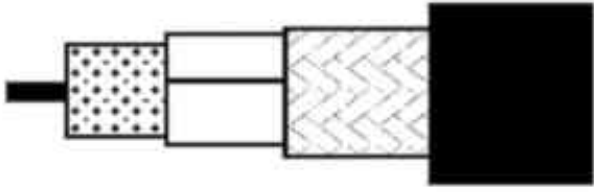

Product Description

COAX RF H1000 FRNC/LSNH-C

Product Specifications

Application

Application 1:

Coaxial cables used for Radio-Frequency designed according the International Standard IEC 1196

Technical Specifications

Bend Radius

Min Bend Radius (W/o Pulling Strength):

100 mm

CCB-Sub-Crush Resistance

Crush Resistance:

Max. 1% (load of 700N) N

CCB-Sub-Material

Min Elongation at Breakof Jacket:

150 MPa

Min Tensile Strength of Jacket:

12.5 lbs

Environmental Characteristics

Operating Temp Range:

-30 to +70 °C

Storage Temp Range:

-30 to +70 °C

Installation Temp Range:

-5 to +50 °C

General Electrical Parameters

Min Insulation Resistance:	10000 mOhm/1000ft
----------------------------	-------------------

Global Standard

ISO/IEC Compliance:	IEC 1196
---------------------	----------

History

Revision Date:	2013-04-25
----------------	------------

Revision Number:	2
------------------	---

Safety

Other Flammability:	CEI 20-22-3
---------------------	-------------

ISO/IEC Flammability:	IEC 60332-3-24
-----------------------	----------------

Amt of Halogen Acid Gas; MaxConductivity:	10 μ S/mm
---	---------------

Amt of Halogen Acid Gas; Min pH:	4.3
----------------------------------	-----

Smoke Density; Min Transmittance:	Zero N
-----------------------------------	--------

Stripping Performance

Adhesion Dielectric:	41-410 at 50 mm
----------------------	-----------------

Impedance:

Nominal Characteristic Impedance

50 mOhm/ft	2 Ohm	Min. 46 dB
------------	-------	------------

Conductor DCR:

Max. Conductor DCR Max. Conductor Loop Max. Shield DCR

3.5 Ohm/100m	15.5 Ohm/1000ft	12 Ohm/km
--------------	-----------------	-----------

Delay:

Nominal Velocity of Propagation (VP) Velocity of Propagation Tolerance

83 ns/100m	2 %
------------	-----

Voltage:

Voltage Test Dielectric

3 kV DC

Screening:

Frequency	Min. Screening Attenuation
30 - 1000 MHz	90

Capacitance:

Capacitance Tolerance	Nominal Capacitance
3 pF/m	80 pF/m

High Frequency (Nominal/Typical):

Element	Frequency (MHz)	Nom. Insertion Loss
	5 MHz	0.8 db/100m
	50 MHz	2.8 db/100m
	100 MHz	4 db/100m
	200 MHz	5.7 db/100m
	400 MHz	8.4 db/100m
	600	10.5 db/100m
	800	12.3 db/100m
	1000	14 db/100m
	1350	16.7 db/100m
	1750	19.5 db/100m
	2150	22.1 db/100m
	2400	23.6 db/100m
	5000	37.4 db/100m
	10000	59.3 db/100ft

Max. attenuation 10% higher

Insulation:

Element	Type	Material	Nominal Diameter	Diameter +/- Tolerance
	Dielectric	Foamed Polyethylene	7.15 mm	0.2 mm

Centricity min. 85%

Outerjacket 1:

Element	Material	Nominal Diameter	Diameter - Tolerance
	FRNC / LSNH	10.3 mm	0.3 mm

According to European Standard HD 624

Conductor:

Stranding	Material	Nominal Diameter	Diameter +/- Tolerance
Solid	Bare copper	2.62 in	0.03 mm

Outershield 1:

Type	Layer	Material	Coverage	Min. Overlap	Nominal Diameter	Diameter +/- Tolerance	Coverage +/- Tolerance
Tape	1	Copper - Polyester		2 mm			
Braid	2	Bare copper	49 %		7.8 mm	0.25 mm	5 %

Product Variants

Part Number	Color	Put-Up Type	Length
H1000CH.002000	BLACK	Reel	2000 m
H1000CH.00500	BLACK	Reel	500 m

© 2015 Belden, Inc

All Rights Reserved

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with EU RoHS (Directive 2002/95/EC, 27-Jan-2003). Material manufactured prior to the compliance date may be in stock at Belden facilities and in our Distributor's inventory. The information provided in this Product Disclosure, and the identification of materials listed as reportable or restricted within the Product Disclosure, is correct to the best of Belden's knowledge, information, and belief at the date of its publication. The information provided in this Product Disclosure is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. This Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.

Belden declares this product to be in compliance with EU LVD (Low Voltage Directive 73/23/EEC), as amended by directive 93/68/EEC.